

# DX400/W Mac Driver and Firmware Updater

This README document is packaged with the FUJIFILM DX400/W **Mac printer driver**, the DX400/W **firmware update** that is required to install it, and the updated DX400 Series **User's Guide** (5th Edition).

The Mac printer driver and firmware update work the same for the DX400 and the DX400-W, which are referred to collectively as **DX400/W** (or “printer”) in this document.

**Please note that a Windows PC is required to install the firmware update on the DX400/W.** The firmware update *cannot* be installed using a macOS computer.

It is recommended that you update the firmware on the DX400/W using a PC *before* installing the Mac Printer Driver.

## System Requirements for Mac


System Requirements for macOS Computer> Operating system	OS X 10.9.5 Mavericks or later
CPU	Intel Core 2 Duo 2.0 GHz or higher
Main memory	2 GB or more
Hard disk (free space required for installation)	2 GB or more
Display resolution	WXGA+ (1440×900) or higher
How to connect to this machine	USB connection, wired LAN connection
Maximum number of connections	Up to 4 units

## How to Install the DX400/W Firmware Update (CL29PA)


**Caution:** To avoid data corruption, do not turn off the printer until the update is complete. The printer update is not actually finished when the firmware updater displays “Finish”. The update is complete when the printer display of the DX400/W changes and the ROM version is displayed.

1. Connect the printer to the PC with a USB cable
  - a. As a reminder, you *cannot* use a Mac for the firmware update
2. Turn the printer on in normal mode and wait for it to fully start up
3. Extract the contents of **FWCL66TL\_CL29PA.zip** onto your PC
  - a. Do not run the firmware updater without uncompressing the .zip first
4. Start the firmware updater (**FWCL66TL\_CL29PA.exe**)


5. Click **Next** on the Introduction screen of the firmware updater to begin

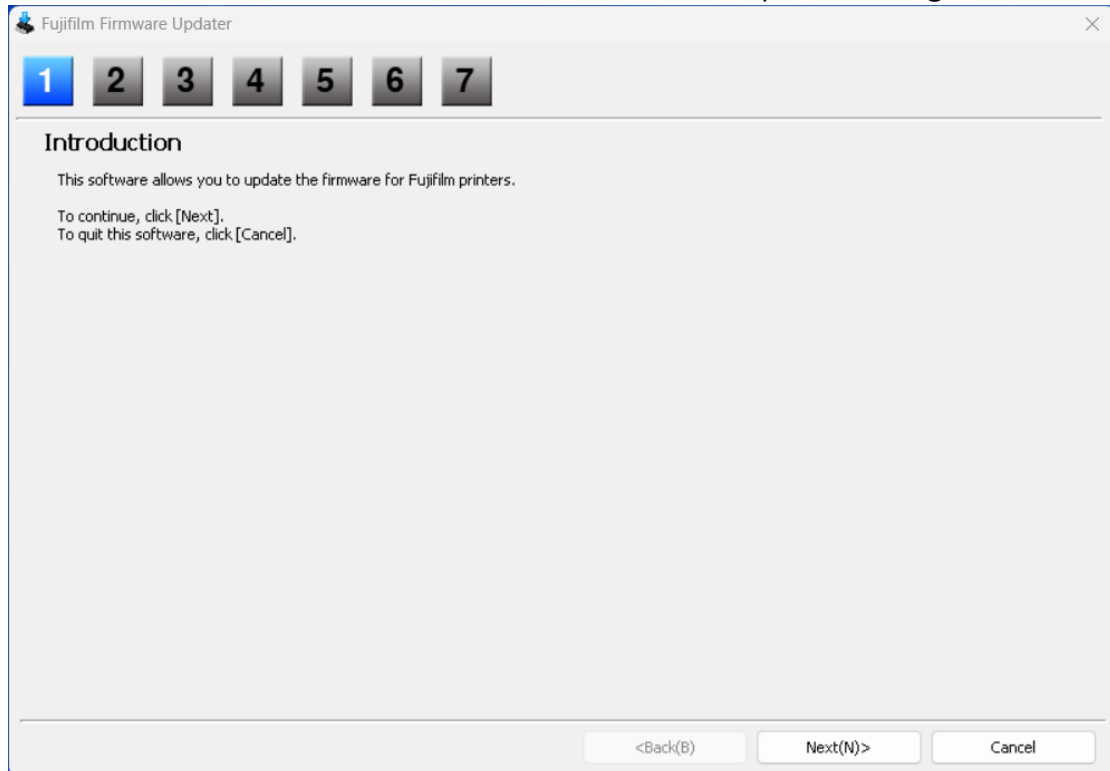


6. After reading the Software License Agreement, select **"I agree."** and then click **Next** to continue

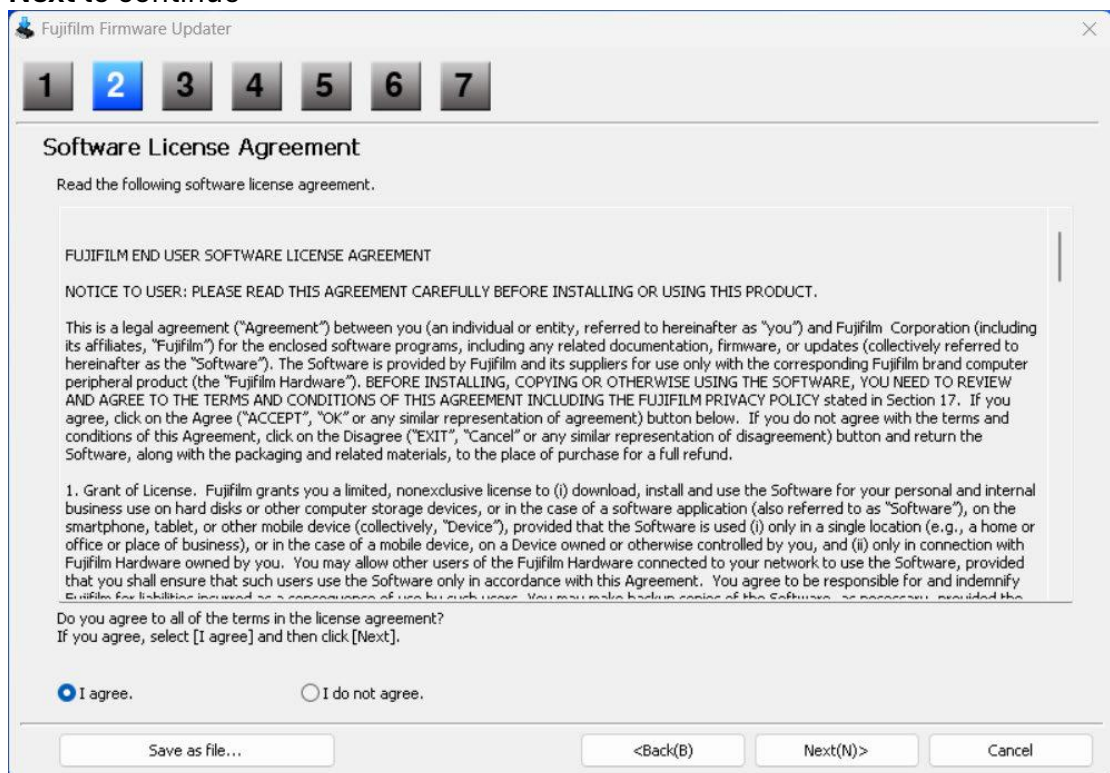

7. Read the Instructions and Precautions by clicking **Next** and then **Next** again

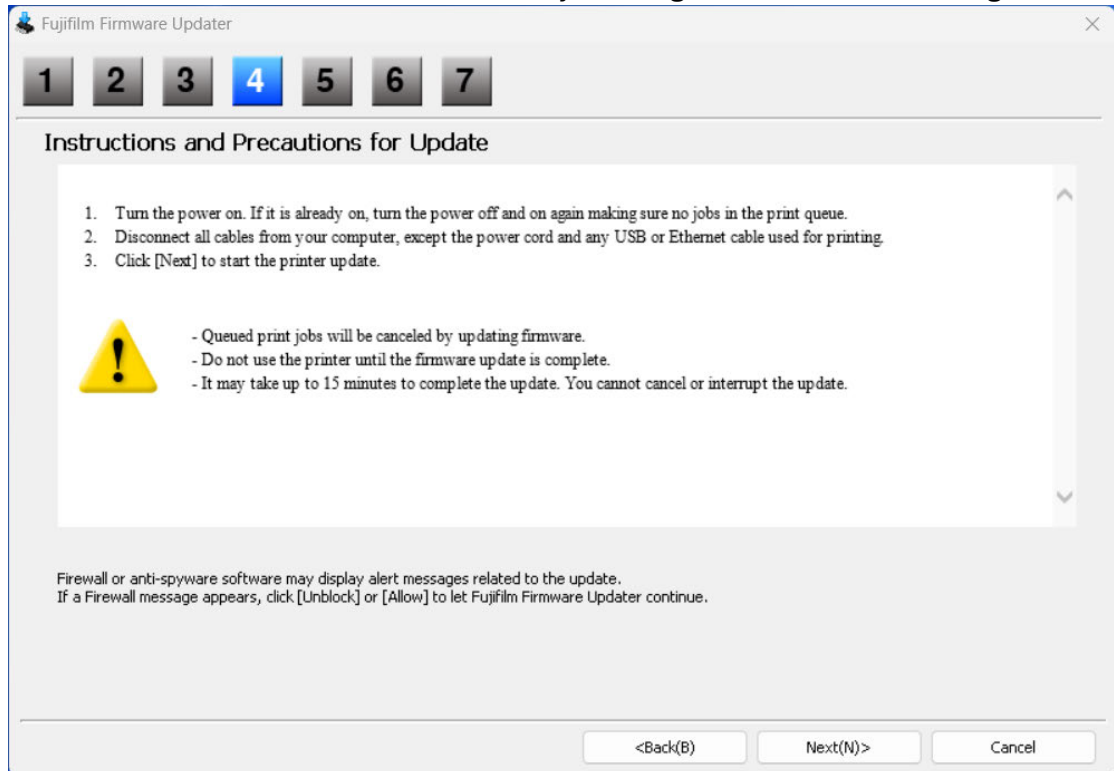

8. Select the checkbox for the **DX400** (or DX400-W) and then click **Start** to begin the update

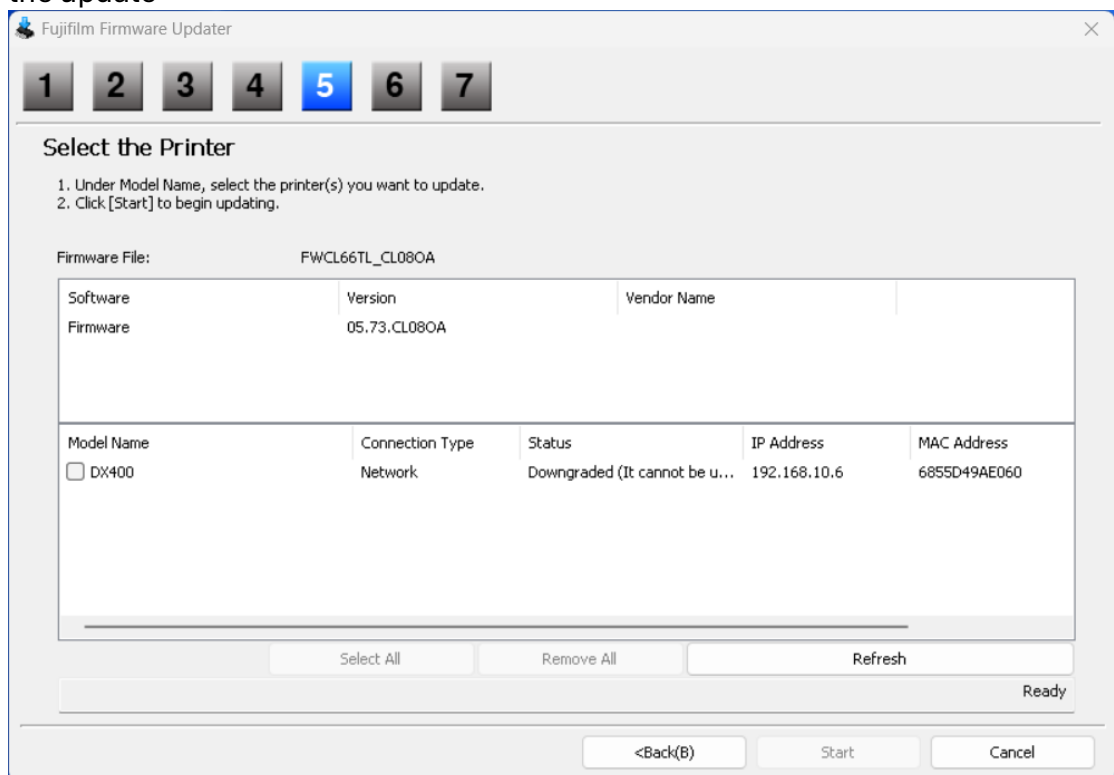

9. The printer will automatically power off and on again when the update is finished

10. Click **Finish** when the update is complete
  - a. *Do not power off or disconnect the printer* until the printer panel display changes and the ROM version is displayed, indicating that the firmware update is fully complete

## How to Install the Mac Printer Driver (Version 13.46)

Once the DX400/W firmware is updated, you can install the Mac Printer Driver. Follow the instructions on **pages 23 to 24** of the DX400 Series **User's Guide** 5th Edition, under the section titled "Installing the Printer Driver (Mac)". The updated User's Guide is included in the .zip file for your convenience.